



Coder Unlimited **'Desk 1S/3S'**

Are **multifunctional Ticket Coders** important to you? SKIDATA has the **intelligent AND reliable Ticket Printer and Ticket Coder** for you.

Efficiency for You and your Business

- Tickets (RFID and Barcode) are issued quickly and automatically from the stacker
- Single or Triple Stacker version (1S / 3S) that produce tickets automatically and can be refilled at the same time
- Space saving ticket tray for up to 100 tickets

Ticket coding without effort

- Automatically produced tickets at the push of a button
- This is no more than a simple routine for your staff
- Quick, reliable and silent ticket coding
- Your staff can concentrate on their main tasks


The clever way to save money

- The best choice for points of sale with a normal to high customer frequency
- Having trouble with illegal ticket sales? Coder Unlimited 'Desk 1S/3S' minimizes the risk of fraud
- Of course, the high quality and reliability SKIDATA is renowned for are still essential features

Proved Service & Module concept

- Experience gained all over the world guarantees the highest possible degree of quality
- A low-maintenance unit, still easy to maintain
- Long SKIDATA-Life-Cycle-Support
- Proved and tested modules in all SKIDATA segments
- The use of modules across different applications ensures you keep up with technical developments

all dimensions in mm

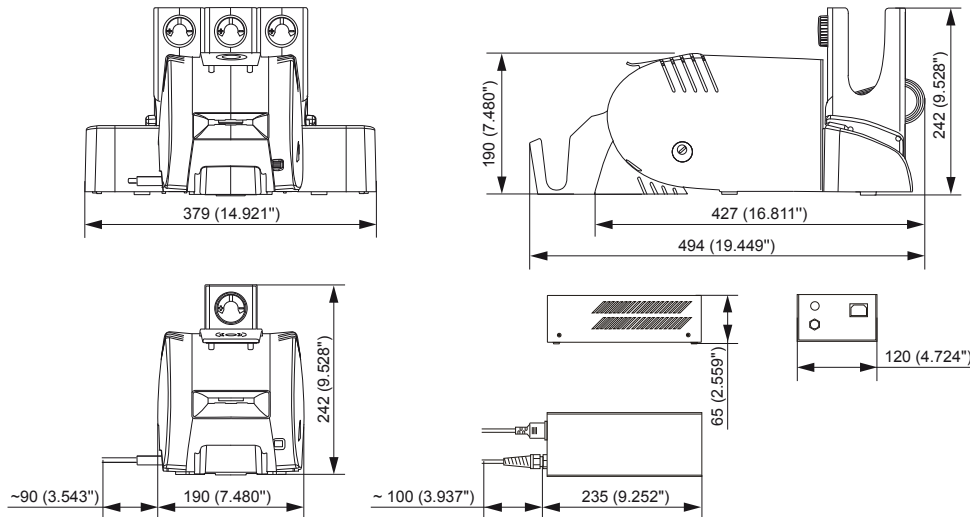

Properties

- Desktop unit with external power pack and USB connection
- Available as 1-stacker or 3-stacker version
- Internal & external RFID antenna with rest
- Barcode imprint checked by an optional scanner
- High-quality ticket imprinting over the whole surface
- The imprint of ThermoReWrite keycards can be erased and keycards can be imprinted in blue at the same time
- Ticket tray capacity: up to 50 keycards, 80 keytix, 100 TL360 tickets
- Fraud prevention through the imprinting, coding and checking of tickets in one go; the (locking system) key can be removed
- Extremely low noise emission in the office
- Very easy maintenance, due to freely accessible ticket transport channel and stacker
- Can be cleaned manually and without tools

Standard Version

Basic unit, in three-part design

- Chassis with Quick-Lock holder for main module
- Main module "Coder Unlimited / Base Unit" with 300-dpi thermal print head and RFID module *)
- Cover with lock, ticket intake and RFID rest

Stacker unit with 1 or 3 stackers

- Up to 150 keycards / 450 TL360 tickets per stacker, can be refilled at any time
- Ticket thickness can be separately defined for single stackers (0.29–1.20 mm / 0.011"–0.047")

Options

- Barcode scanner that checks the correct production of tickets
- Cable for cashbox control
- Locking system cylinder and key
- Cleaning kit for Coder Unlimited

Technical Specifications

Dimensions	Desktop unit (1 stacker): 190 mm x 242 mm x 494 mm / 7.48" x 9.53" x 19.45" (w x h x d) Desktop unit (3 stackers): 379 mm x 242 mm x 494 mm / 14.92" x 9.53" x 19.45" (w x h x d) Power pack: 120 mm x 65 mm x 235 mm / 4.72" x 2.56" x 9.25" (w x h x d)
Weight	Desktop unit 1 stacker 5,90 kg (13 lbs) / 3 stackers 7,7 kg (17 lbs) / power pack 1 kg (2.2 lbs)
Power supply	85–32 V AC or 170–265 V AC / 47–63 Hz to 24 V DC
External power pack	
Power consumption	max. 156 W at 24 V DC
Temperature range	0 °C to +40 °C (+32 °F to +104 °F) / max. 90 % r.H. (non-condensing)
Enclosure colors	Silver-gray anthracite bright (~ RAL 9006), Anthracite dark (~ RAL 7043) Data carrier rest: SKIDATA Yellow (approximates Pantone 114U)
RFID Data carriers *)	keycard basic/unlimited/ca13/advanced/venue, keytix light, keywrist light (data carrier: only 13MHz, ISO-15693)
Barcode data carriers	TL360 (Interleaved 2/5 crosswise, with infrared illumination)
Interfaces	USB 2.0 compatible / Cashbox (1 input / 1 output)
USB driver	XP(e)/W2000/SRV2003/Vista (x86 only), W7(e)/W2k8R2 (x86+x64)
Declarations / Certifications	CE, UL _{us} , GOST-R, FCC, IC, KCC, Japan Certification (MIC)

*) Confirmation whether different data carriers and/or formats will function properly can be obtained only from the Sales Support Center.

*) Processing of 125 kHz SKIDATA data carriers will be supported ONLY with an optional RFID module downgrade until the end of 2016 at the latest.

*) NO additional new 13 MHz data carriers will be implemented into the existing 125kHz/13MHz RFID Module (End-of-Service).