

The mark of responsible forestry



keytix 'light'

A disposable RFID ticket that offers several long-term advantages.

Save money, increase flexibility

- Quit using barcode scanner and save money on handling returns of reusable cards.
- Let it be day permits of seasonal passes:
 SKIDATA has the suitable keytix 'light' for you.

Responsible behavior

- Act responsibly. The decision for keytix 'light' is a decision for the environment.
- FSCTM-certified: The paper for the tickets comes from responsible sources.
- All data carriers are free from Bisphenol A. keytix 'light' paper and keytix 'light' plastic are also free from PVC.


A card you can use in versatile ways

- Users enjoy convenient, touch-free access.
- Various applications enable you to bundle products and start valuable business partnerships.

Why it is the card of choice

- You benefit from fast scanning of your guests and from security features that make fraud difficult.
- Design tickets according to your corporate design and use unused areas as advertising space.



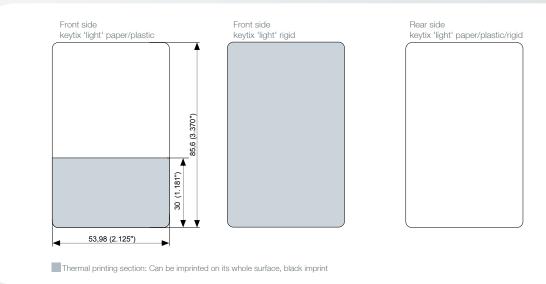

Properties

all dimensions in mm

- Data carrier for use during a limited period of time
- Manufactured in Europe
- One-time printable, one-time codeable
- Multiple permits can be stored (Skiing, Hotel, Parking)
- For all permissions, including, e.g., Single Ride Tickets, Non-Consecutive Day Tickets, and time or value-based tickets
- Allows customer-specific design; four-colored offset printing
- Single ticket in ISO format (cheque card format)
- Secure SKIDATA FlexSpace, plus unprotected FlexSpace
- Fraud protection at credit card level
- Handsfree access

Standard Version

keytix 'light' paper- customer-specific

• back side four-colored offsetprint

keytix 'light' plastic - customer-specific

• back side four-colored offsetprint

keytix 'light' rigid - customer-specific

• back side four-colored offsetprint

Options

• Front side four-colored offsetprint

Technical Spec	ifications
Dimensions	keytix 'light' paper/plastic: 53.8 mm x 85.6 mm x 0.54 mm / 2.125" x 3.370" x 0.021" (w x h x d) keytix 'light' rigid: 53.8 mm x 85.6 mm x 0.84 mm / 2.125" x 3.370" x 0.033" (w x h x d)
Technology	RFID according to ISO15693, no battery
Memory Management	2 permits in Secure FlexSpace +704 bits unsecured FlexSpace; Chip-ID: 01
Range	Freemotion.Gate 'Full': in the whole reader area within a distance of 70 cm (28"); Easy.Gate, AS x70i DUO: about 35 cm (14")
Materials	keytix 'light' paper: FSC™ certified paper, high degree of waterproofness, free from PVC and Bisphenol A keytix 'light' plastic: special plastics, waterproof, free from PVC and Bisphenol A keytix 'light' rigid: special plastics, waterproof, free from Bisphenol A
Surface	Scratch-resistant thanks to its transparent lacquer; semi-gloss
Typical period of use	keytix 'light' paper: typical for one day keytix 'light' plastic: up to 10 days keytix 'ligh't rigid: up to 90 days
Fraud protection	Transaction security, password protection, data encryption
Manufacturing Quality	100 % quality check, failure rate smaller 1 %
Ambient conditions	$-30~^{\circ}\text{C}$ to $+50~^{\circ}\text{C}$ ($-4~^{\circ}\text{F}$ to $+122~^{\circ}\text{F}$); 0–100 % relative humidity
Storing conditions	In its original packaging between +5 °C and +25 °C (+41 °F and +77 °C), with a relative humidity of max. 60 %
System requirements	Freemotion.Logic: Version 17.04.07, 18.03.02, 19.03.00 or higher Devices: ASx70i DUO, Freemotion.Gate or Easy.Gate Handshake.Logic: Version 4.02 or higher Devices: ASx70i Compact V2, Freemotion.Gate or Vario.Gate Flexible.Logic: Version 12.3 or higher APT450.Logic: Version 20.01.06, 21.00.06, 22.00.03 or higher Device generation Coder Unlimited Parking.Logic: Version 3.01.06, 4.00.06, 5.00.03 or higher Device generation Coder Unlimited DTA.Interface: Version 7 or higher